

ILS-N-WL003

UPDOWN WALL LIGHTING SERIES

Description

In the hushed embrace of twilight, ILS LED Wall Light emerges, a luminescent tapestry weaving whispers of modern elegance. Its gentle glow dances upon walls, painting narratives of ambiance and sophistication. An artful symphony of illumination, it whispers secrets to shadows, crafting an enchanting oasis in the nocturnal embrace of space and time.

Applications


Some common applications of wall light include: Landscape Lighting, architectural highlighting, safety and pathway lighting, terrace and patio lighting, event and decorative lighting, commercial and retail and etc.

Specifications

Model No	: ILS-N-WL003
Power	: 2x6W
Voltage	: AC220V, 50/60Hz
Lamp Type	: LED
Color Temp.	: 3000K
Beam Angle	: 12°, 24°, 36°, 45°, 90°
CRI	: Ra>70
IP/IK Rating	: IP65
Operating Temp.	: -20°C ~ 40°C
Housing	: Die cast aluminum
Diffuser	: Tempered glass



Dimensions (mm)

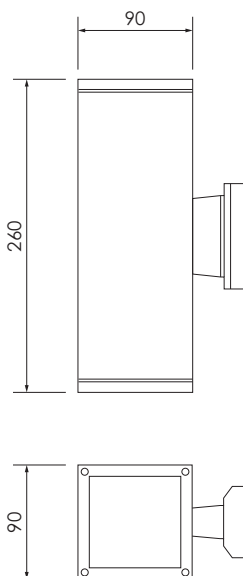

+6016-6815 840 | Jason Chiew



ils_jason@hotmail.com